

Total No. of Questions : 8]

SEAT No. :

P1487

[Total No. of Pages : 3

[6002]-114

S.E. (Electronics/E & TC Engineering)

ELECTRICAL CIRCUITS

(2019 Pattern) (Semester-III) (204183)

Time : 2½ Hours]

[Max. Marks : 70

Instructions to the candidates:

- 1) Answer Q.1 or Q.2, Q.3 or Q.4, Q.5 or Q.6, Q.7 or Q.8.
- 2) Figures to the right indicate full marks.
- 3) Assume Suitable data if necessary.

Q1) a) What is a two port network? Mention the application of two port network parameters [6]

b) Determine the z parameters for the circuit shown in Fig. 1. [6]

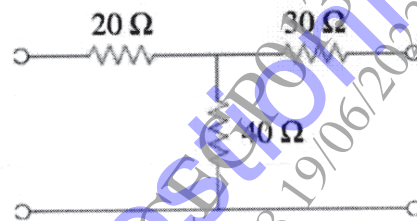


Fig. 1

c) Find the condition for symmetry and reciprocity of Z parameter. [6]

OR

Q2) a) Explain the pole-zeros of network function. Also state its significance. [6]

b) Find h-parameters for the network shown in Fig. 2. [6]

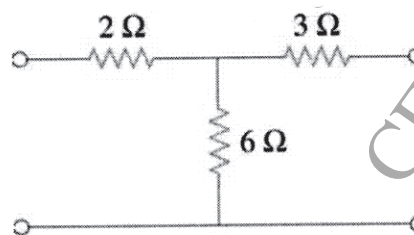


Fig. 2

P.T.O.

- c) Determine  $Z(s)$  in the network shown in Fig.3. Find poles and zeros of  $Z(s)$  and plot them on s-plane. [6]

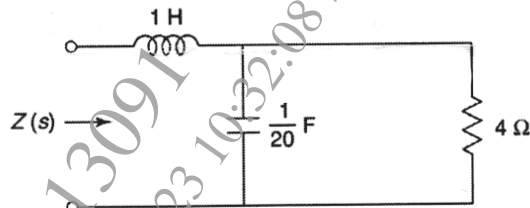


Fig. 3

- Q3)** a) What are the types of DC motor? A series motor should not be started on no load. Why? [5]
- b) Draw a neat sketch of a DC generator. State the functions of each part. [6]
- c) A 200 V lap wound DC shunt motor has 800 conductors on its armature. The resistance of the armature winding is  $0.5 \Omega$  and that of field winding is  $200 \Omega$ . The motor takes a current of 21 A, the flux per pole is 30 m Wb. Find the speed and torque developed in the motor. [6]

OR

- Q4)** a) Explain significance of back e.m.f. in a DC motor. [5]
- b) A 4 pole DC shunt generator with lap connected armature has field and armature resistances as  $50 \Omega$  and  $0.1 \Omega$  respectively. If the generator has to supply 60 lamps, with rating 100V/40 W each. Calculate [6]
- Total armature current
  - Current in each armature conductor
  - Generated EMF
- Take 1V per brush as contact drop.
- c) Why starter is required in a DC motor? Under what condition the mechanical power developed in a dc motor will be maximum? [6]

- Q5)** a) Explain the effect of loading on induction motor. [6]
- b) What are different methods of speed control for three phase induction motor. Explain any one. [6]

- c) The power input to a 500V, 50Hz, 6 pole, 3 phase induction motor running at 975 rpm is 40kW. The stator losses are 1kW and the friction and windage losses total 2 kW. Calculate: [6]
- slip
  - rotor copper loss
  - shaft power
  - efficiency

OR

- Q6) a) State any 4 use of single phase induction motor? Differentiate between “capacitor start” & “Capacitor start capacitor run” Single phase induction motor? [6]
- b) What are types of 3-phase induction motor? Explain any one in detail. [6]
- c) The power input to the rotor of a 440V, 50 hz, 6 pole, 3 phase induction motor is 100kW. The rotor electromotive force is observed to make 120 cycles per minute. Calculate: Rotor speed. [6]
- Mechanical power developed
  - Rotor copper loss per phase

- Q7) a) Give types and applications of stepper motor. [5]
- b) What is Brushless DC motor? Explain working and construction of any one type of BLDC motor. [6]
- c) What is the need of electric vehicle? Also give the advantages and disadvantage of electric vehicle. [6]

OR

- Q8) a) Compare Brushless DC motor with conventional DC motor. [5]
- b) Explain the construction and operation of permanent magnet stepper motor. [6]
- c) Draw the block diagram and explain components of electric vehicle. [6]

