

Total No. of Questions : 8]

SEAT No. :

PA-1181

[Total No. of Pages : 3

[5925]-203

S.E. (Civil)

FLUID MECHANICS

(2019 Pattern) (Semester-III) (201003)

Time : 2½ Hours]

[Max. Marks : 70

Instructions to the candidates:

- 1) Answer Q.1 or Q.2, Q.3 or Q.4, Q.5 or Q.6, Q.7 or Q.8.
- 2) Answer to the all questions should be written in single answer-book.
- 3) Neat diagrams must be drawn wherever necessary.
- 4) Figures to the right indicate full marks.
- 5) Use of logarithmic tables, slide rule, Mollier charts, electronic pocket calculator (non programmable) and steam tables is allowed.
- 6) Assume suitable data, if necessary.

Q1) a) A 1:15 model of a flying boat is towed through water. The prototype is moving in seawater of density 1025 kg/m^3 at velocity of 21 m/s. Find the corresponding speed of the model. Also, determine the resistance due to waves on model if the resistance due to waves of the prototype is 610N.

[9]

b) Explain the phenomenon of Boundary Layer Separation and Methods to control to it.

[8]

OR

Q2) a) The resisting force R of a supersonic plane during the flight can be considered as dependent upon the length of the aircraft l , velocity V , air viscosity μ , air density ρ , and bulk modulus of air K . Express the functional relationship between these variables and the resisting force. Use Buckingham's Π Method

[9]

b) Explain with the help of neat sketch

[8]

- i) Laminar boundary layer
- ii) Turbulent boundary layer
- iii) Laminar Sub-layer.

P.T.O.

- Q3) a)** A pipe of 110 mm diameter is carrying water. If the velocities at the pipe center and 30 mm from the pipe centre are 2.1 m/s and 1.6 m/s respectively and flow in the pipe is turbulent. Calculate the shear friction velocity and wall shearing stress. [9]
- b) Derive with usual notations the following Darcy-Weisbach equation for the loss of energy due to friction. [8]

$$h_f = \frac{4 f \cdot L V^2}{2 \cdot g \cdot D}$$

OR

- Q4) a)** A fluid of viscosity 8 poise and specific gravity 1.2 is flowing through a circular pipe of diameter 100 mm. The maximum shear stress at the pipe wall is 211 N/m². Find: [9]
- The pressure gradient,
 - The average velocity, and
 - Reynolds number of the flow
- b) Explain the procedure of Hardy Cross method for the analysis of pipe network. [8]

- Q5) a)** The discharge of water through a rectangular channel of width 8 m, is 15.5 m³/s when the depth of flow of water is 1.25 m. Calculate: [10]
- Discharge per unit width
 - Velocity of flow
 - Specific energy of the flowing water
 - Critical depth
 - Critical velocity and
 - Value of minimum specific energy.
- b) Derive with usual notations the basic governing “energy equation” of channel flow. [8]

OR

- Q6) a)** A trapezoidal channel has side slope of 3 horizontal to 4 vertical and slope of its bed is 1 in 2000. Determine the optimum dimensions for the channel sections and show it with neat sketch, if it is carry water at 0.55 m³/s. Take Chezy’s constant as 80. [9]

- b) i) Explain the Specific energy curve with neat sketch. [5]
 ii) Find the rate of flow of water through a V-shaped channel as shown in Figure 6 b. Take the value of $C=56$ and slope of the bed 1 in 2000. [4]

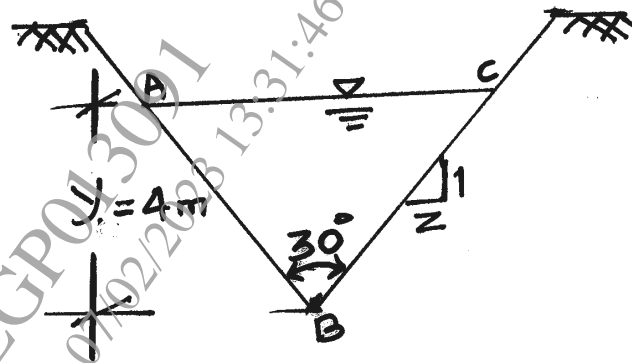


Fig:- 6 b

(NOT TO SCALE)

- Q7) a) A metallic ball of diameter 2×10^{-3} m drops in a fluid of sp. gr. 0.96 and viscosity 15 poise. The density of the metallic ball is 12000 kg/m^3 . Find: [10]
 i) The drag force exerted by fluid on metallic ball,
 ii) The pressure drag and skin friction drag, and
 iii) The terminal velocity of ball in fluid.

- b) Explain Classification of channel bottom slopes with neat sketches. [8]
 OR

- Q8) a) A rectangular channel is 20 m wide and carries a discharge of $65 \text{ m}^3/\text{s}$. It is laid at a slope of 0.0001. At a certain section along the channel length, the depth of flow is 2m. How far U/S or D/S will the depth be 2.6m? Take $n=0.02$. Use direct step method with three steps. Consider the depth increment in the interval of 0.1m. Classify and sketch the profile. [10]

- b) A flat plate $1.5 \text{ m} \times 1.5 \text{ m}$ moves at 51 m/hr in stationary air of density 1.16 kg/m^3 . If the co-efficient of drag and lift are 0.16 and 0.76 respectively, determine: [8]
 i) The lift force,
 ii) The drag force
 iii) The resultant force, and
 iv) The power required to keep the plate in motion.

