

Total No. of Questions : 8]

SEAT No. :

PA-1424

[Total No. of Pages : 2

[5926]-40

T.E. (Civil)

DESIGN OF STEEL STRUCTURES
(2019 Pattern) (Semester - I) (301003)

Time : 2½ Hours]

[Max. Marks : 70

Instructions to the candidates:

- 1) Answer Q.1 or Q.2, Q.3 or Q.4, Q.5 or Q.6 and Q.7 Q.8.
- 2) Neat sketches must be drawn wherever necessary.
- 3) Figures to the right indicate full marks.
- 4) Take $f_y = 250$ and $f_c = 410$ grade of steel.
- 5) Take ultimate stress in bolt, $f_{ub} = 400$ N/mm².
- 6) Assume suitable data, if necessary.
- 7) Use of electronic pocket calculator, IS : 800-2007 and steel table are allowed.
- 8) Use of cell phone is prohibited in the examination hall.

- Q1)** a) State and explain in brief type of column bases. [3]
b) Check the adequacy of ISHB 450 @ 85.4 kg/m to carry a factored axial load of 750 kN at an eccentricity of 270 mm about major axis. The effective length of column is 3 m. Consider only section strength. [14]

OR

- Q2)** a) Find buckling class of section ISHB 400 @ 77.4 kg/m used as a column. [3]
b) A column consist of section ISHB 350 @ 67.4 kg/m carries an axial compression factored load of 1700 kN. Design a suitable bolted gusseted base. The base is rest on M20 grade of concrete pedestal. Use 20 mm diameter bolts for the connection. [14]

- Q3)** a) Explain in brief how lateral support is provided to the compression flange of beams with suitable sketches. [4]
b) A simply supported beam carries a uniformly distributed load of magnitude W kN/m on entire span of 6 m. The compression flange is *laterally unsupported* throughout the span. Find the intensity of uniformly distributed load the section ISMB 500 @ 89.6 kg/m can carry for the beam safely. Both ends of beam are fully restrained against torsion. [14]

OR

- Q4)** a) Classify the section ISLB 500 @ 75.0 kg/m and ISA 100 × 75 × 8 mm @ 10.5 kg/m used as a beam. [4]
b) Design a suitable I-section for a simply supported beam of span 6 m carrying a dead load 20 kN/m and live load 40 kN/m. The beam is *laterally supported* throughout the span. [14]

P.T.O.

- Q5)** Determine panel point dead load, imposed load and wind load for a truss as shown in Figure 1. Assume design wind pressure as 1100 N/m^2 , use G.I. Sheet and the centre to centre spacing of truss as 4 m . Assume self-weight of purlin 120 N/m . [17]

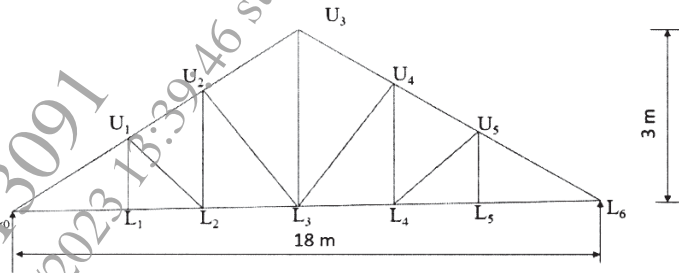


Figure 1

OR

- Q6)** Design a gantry girder to be used in an industrial building carrying a manually operated overhead travelling crane, for the following data: [17]

- Crane capacity 200 kN
- Self-weight of the crane girder excluding trolley 200 kN
- Self-weight of the trolley, electric motor, hook, etc. 40 kN
- Minimum approach of the crane hook to the gantry girder 1.20 m
- Wheel base 3.5 m
- Span of crane girder 16 m
- Span of gantry girder = 8 m
- Self-weight of rail section 300 N/m

- Q7)** a) Explain in brief IS provisions for length and spacing of intermittent weld. [4]
 b) A Simply supported welded plate girder of span 30 m is subjected to uniformly distributed load 30 kN/m on whole span excluding self weight of plate girder. Design cross section of plate girder. Assume compression flange is laterally supported throughout the span. [14]

OR

- Q8)** a) Explain in brief flange curtailment of plate girder. [4]
 b) A simply supported welded plate girder is designed for the span of 24 m . It is subjected to a shear force of 2300 kN and bending moment of 20700 kNm . A section used for plate girder to carry above load is as given below - [14]
 Flanges - 780 mm wide and 50 mm thick
 Web - 16 mm thick and 2600 mm deep
 Design intermittent welded connection between flange and web. Also design end bearing stiffener.

