

Total No. of Questions : 8]

SEAT No. :

P3611

[5560]-566

[Total No. of Pages : 3

T.E.(Electrical)

CONTROL SYSTEM - I  
(2015 Course) (Semester - II)


Time : 2½ Hours]

[Max. Marks : 70


Instructions to the candidates:

- 1) Answer any one question from each pair of questions : Q.1 or Q.2, Q.3 or Q.4, Q.5 or Q.6, Q.7 or Q.8.
- 2) Figures to the right indicate full marks.

Q1) a) Draw the electrical analogous network and write the equation [7]

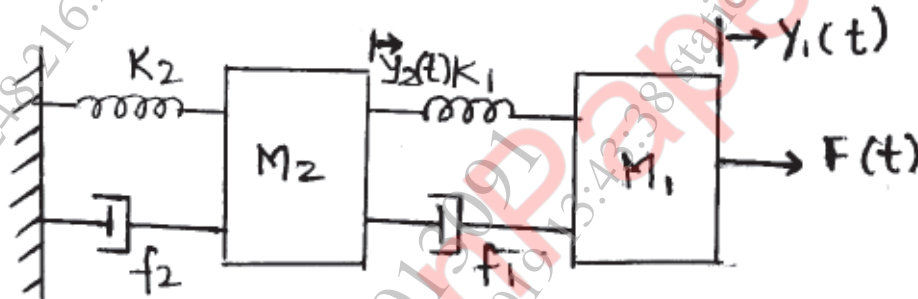

- b) The poles of a real rational transfer function are given as 0, -1 and -4. There is a single zero (of order 2) at  $S = (-3)$ . Determine the transfer function and plot pole zero on S-plane. [5]
- c) The block diagram of a unity feedback control system shown in figure below. [8]

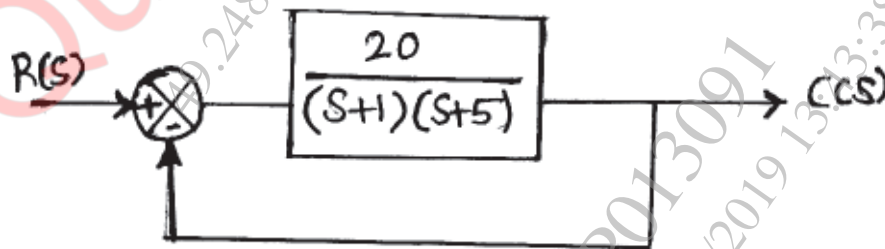

Determine the characteristic equation of the system  $\omega_n$ ,  $\xi$ ,  $\omega_d$ ,  $t_p$ ,  $M_p$  the time at which the first overshoot occurs, the time period of oscillation.

OR

P.T.O.

**Q2) a)** Define the following: [7]

- i) Time response
- ii) Transient response
- iii) Steady state response
- iv) Delay time
- v) Rise time
- vi) Peak time
- vii) Settling time

b) A characteristic equation of a feedback control system is given by  $s^5 + s^4 + 4s^3 + 4s^2 + 2s + 1 = 0$  comment on stability. [4]

c) A unity feedback control system has an open loop transfer [9]

$G(s) = \frac{K}{s(s^2 + 4s + 13)}$  Sketch the root locus of the system by determining the following

- i) centroid and angle of asymptotes
- ii) Angle of departure from the poles
- iii) The value of K and the frequency at which the root locus crosses the imaginary axis.

**Q3) a)** Define and write formula [8]

- i) Resonant frequency
- ii) Resonant Peak
- iii) Band width
- iv) Plot  $M_r$ ,  $M_p$  versus  $\xi$  for a second order system

b) A unity feedback system has open loop transfer function

$G(s) = \frac{(s + 2)}{(s + 1)(s - 1)}$  using nyquist criterion determine whether the closed loop system is stable or not. [8]

OR

**Q4) a)** Briefly state the nyquist criterion. [6]

b) Sketch the bode plot for the system whose open loop transfer function is given by  $G(s) = \frac{20(0.1s + 1)}{s(0.5s + 1)(0.3s + 1)}$  and find GM, PM,  $\omega_{gc}$ ,  $\omega_{pc}$ . [10]

**Q5) a)** Define Gain margin, phase margin, phase crossover frequency, gain crossover frequency. [6]

**b)** Sketch the asymptotic plot for open loop transfer function given by

$$G(s) = \frac{2(s+0.25)}{s^2(s+1)(s+0.5)}$$

from bode diagram determine GM, PM,  $\omega_{gc}$ ,  $\omega_{pc}$ . [12]

OR

**Q6) a)** Sketch bode diagram showing gain margin and phase margin for [6]

- i) Stable system
- ii) Unstable system

**b)** Using nyquist criterion investigate the stability of a closed loop control system whose open loop transfer function is given by [12]

$$G(s) = \frac{K}{s(sT1+1)(sT2+1)}$$

**Q7) a)** Write short note on [8]

- i) Lead compensator
- ii) AC Tachometer

**b)** Explain the features of the following [8]

- i) P-Controller
- ii) PI-Controller
- iii) PID-Controller

OR

**Q8) a)** Write short notes on synchros. [6]

**b)** For the system shown below, design PID controller using Zigler Nichol tuning rule [10]

