

Total No. of Questions : 4]

SEAT No. :

PB-17

[Total No. of Pages : 2

[6268]-211

S.E. (Electronics/E&TC)/Electronics & Computer) (Insem)

## SIGNALS & SYSTEMS

(2019 Pattern) (Semester - IV) (204191)


Time : 1 Hour]

[Max. Marks : 30


Instructions to the candidates:

- 1) Solve Q1 or Q2, Q3 or Q4.
- 2) Neat diagrams must be drawn wherever necessary.
- 3) Figures to the right side indicate full marks.
- 4) Use of logarithmic tables slide rule, Mollier charts, electronic pocket calculator and steam tables is allowed.
- 5) Assume Suitable data if necessary.

Q1) a) Find even and odd parts of given signal. [5]

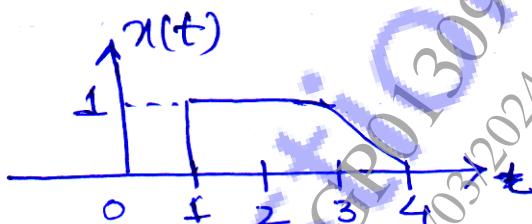


- b) Check whether the given signal is periodic or non-periodic. If periodic find the period. [5]
- $$x(t) = (5\sin t) + (4\cos 3t)$$
- c) Sketch the following  $y(t)$  if  $x(t)$  is [5]

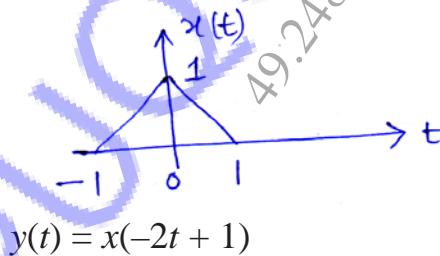

$$y(t) = x(-2t + 1)$$

OR

Q2) a) Check whether the given signal is energy or power. Find energy and power. [5]



P.T.O.

- b) Check whether the given system is linear, Time-Invariant, Memory. [5]  
 $y[n] = x[n - 1] + 20$
- c) Sketch and write mathematical expression for CT & DT signals given. [5]
- Unit step
  - Unit Ramp

- Q3)** a) Find the convolution sum for the two signals given using graphical method. [5]

$$h[n] = \{1, 3, 2\}$$

$$x[n] = \{1, 2\}$$

- b) State and explain the properties of convolution. [5]
- c) From the given impulse response check whether the given system is stable, static and causal. [5]

$$h(t) = 5\delta(t - 1)$$

OR

- Q4)** a) Find the convolution Integral of the following signals. [5]

$$x(t) = u(t) \quad h(t) = u(t - 2)$$

- b) Determine the step response of following system whose impulse response is [5]

$$h(t) = e^{-3t}u(t)$$

- c) Find the overall impulse response for the given system. [5]

